

3-15-00

A

COMMISSIONER OF PATENTS AND TRADEMARKS

Washington, DC 20231

Attorney Docket: 1500P/BC999065

PATENT

Transmitted herewith for filing is the Patent Application of

Inventor(s): Jennie Ching; Eric Hsiao; Peter S. Lee

For: **METHOD AND SYSTEM FOR PROVIDING TUNABLE PARAMETERS TO
CONTROL DISTRIBUTION IN A DIGITAL MEDIA DISTRIBUTOR**

Enclosed with the Patent Application are:

- ☒ Two (2) sheets of Drawings
☒ Declaration and Power of Attorney
☒ Assignment and Recordation Form
☐ Information Disclosure Statement (PTO Form 1449)
☐ A certified copy of a _____ application
☒ Self Addressed, Stamped Postcard

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS		
	20 - 20	= 0
INDEP. CLAIMS		
	3 - 3	= 0
MULTIPLE DEPENDENT CLAIM PRESENTED		

*If the difference in Col. 1 is less than "0", enter "0" in Col. 2

LARGE ENTITY

RATE	FEE
	\$ 690.00
x 18	= \$ 0.00
x 78	= \$ 0.00
+250	= \$ 0.00
TOTAL	\$ 690.00

☒ The Commissioner is hereby authorized to charge Deposit Account No. 09-0452 (IBM Corporation) the amount of \$690.00 for payment of application filing fees.

Respectfully submitted,

SAWYER LAW GROUP LLP
 P.O. Box 51418
 Palo Alto, California 94303
 (650) 493-4540

Joseph A. Sawyer, Jr.
 Joseph A. Sawyer, Jr.
 Sawyer Law Group LLP
 Attorney for Applicants
 Reg. No. 30,801

EXPRESS MAIL CERTIFICATE

I hereby certify that the above paper/fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on **March 13, 2000**, and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231. "Express Mail" no.: EL547854283US. Signature of Person mailing paper/fee:

Joseph A. Sawyer, Jr.
 Joseph A. Sawyer, Jr.

UNITED STATES PATENT APPLICATION

FOR

**METHOD AND SYSTEM FOR PROVIDING TUNABLE PARAMETERS TO CONTROL
DISTRIBUTION IN A DIGITAL MEDIA DISTRIBUTOR**

Inventors:

Jennie Ching

Eric Hsiao

Peter S. Lee

SAWYER LAW GROUP LLP
2465 E. Bayshore Rd., Suite 406
Palo Alto, CA 94303

METHOD AND SYSTEM FOR PROVIDING TUNABLE PARAMETERS TO CONTROL DISTRIBUTION IN A DIGITAL MEDIA DISTRIBUTOR

RELATED APPLICATIONS

The present invention is related to co-pending U.S. Application, entitled
MULTIMEDIA INFORMATION COMPUTER SYSTEM AND METHOD OF
OPERATION OF A PLAYLIST SCHEDULER, serial no. 09/420,802, filed on October 19,
5 1999, and assigned to the assignee of the present invention.

FIELD OF THE INVENTION

The present invention relates to control parameters for tuning distribution in a digital
media distributor in a multimedia broadcast system.

BACKGROUND OF THE INVENTION

Although broadcasters have sophisticated systems for inserting national commercials
into a program stream, including integrated traffic and billing systems, there are numerous
obstacles to implementing a system to insert local commercials at small markets into a
15 national program feed distributed by satellite. Until now, such local spot insertion
advertising was the responsibility of the local broadcaster or cable operator.

Inserting local advertising poses several, nontrivial technical, logistical and business
challenges. First, literally hundreds of widely distributed local operators (or affiliates)
would need to receive the commercials; ad agencies would have to ship analog tapes to
20 hundreds of organizations, with different traffic and billing systems. These tapes would

need to be tested for quality assurance, tracked, and stored until needed. They would then have to be distributed to video tape recorders and readied for computer controlled playout (analog) at the proper time, 24 hours a day, seven days a week. Such infrastructure generally exists at well-funded affiliates in major markets but is nonexistent and prohibitively expensive for smaller operators or affiliates in small markets.

Managing such tapes with ads for local commercials and inserting them properly into the program feed is a complex undertaking not well-suited for the smaller operators, especially for channels with smaller audiences in smaller markets. A quality broadcast involves more than excellent program material; it must provide seamless insertion of national and local advertisements, promotions, and station identifications.

Equally important is the ability to maintain the integrity of the national television programming. Centralized control of the channel's programming (playout) is required to prevent local affiliates from tampering with the programming.

A need exists for an efficient system for distributing digital media data, including tuning distribution by a digital media distributor via control parameters. The present invention addresses such a need.

SUMMARY OF THE INVENTION

The present invention provides aspects of providing tunable parameters to control distribution in a digital media distributor system. A digital media distributor (DMD) with tunable control of digital media data transmission aspect includes a distribution network, a central site system, and a plurality of remote site systems. The central site system utilizes a

plurality of designated control parameters, including uplink parameters, scheduler parameters, and storage parameters, for controlling distribution of digital media data. The plurality of remote site servers receive digital media data transmissions from the central site server via the distribution network according to the designated control parameters.

5 Through the present invention, a plurality of control parameters are provided that allow tuning of distribution in a DMD according to particular transmission needs. The use of the control parameters enhances the flexibility of achieving optimal management of transmissions from a central site to remote sites. More particularly, data storage, scheduling, and uplink components are tuned through the control parameters. These and other
10 advantages of the aspects of the present invention will be more fully understood in conjunction with following detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a block diagram of a digital media distribution system in
15 accordance with the present invention.

Figure 2 illustrates an example of a suitable layered architecture for the central site server.

Figure 3 illustrates a block diagram of the DMD system, including tunable control parameters in accordance with the present invention.

DETAILED DESCRIPTION

The present invention relates to tuning distribution in a digital media distributor

through the use of control parameter values. The following description is presented to enable one of ordinary skill in the art to make and use the invention and is provided in the context of a patent application and its requirements. Various modifications to the preferred embodiment and the generic principles and features described herein will be readily apparent to those skilled in the art. Thus, the present invention is not intended to be limited to the embodiment shown but is to be accorded the widest scope consistent with the principles and features described herein.

In accordance with the present invention, tunable parameters provide control in a digital media distributor (DMD) that provides a complete end-to-end system that gives local cable or network affiliates the ability to provide local ads and announcement insertion together with the delivery of cable or network feed(s). In general, the DMD integrates the entire process of sales, traffic, digital encoding and storage of spots, transmission of data, local insertion of digital ads and announcements, account reconciliation, and billing. Spots (i.e., media such as commercials, station identification, public service announcements, etc.) are digitized by the cable or network operator, and then digitally transmitted to the local cable head-ends or network affiliates from a central site. These digital spots are then stored on the remote site servers located at each head-end or affiliate.

A block diagram of a DMD in accordance with the present invention is illustrated in Figure 1. As shown, the DMD includes three major components: a central site 10, a distribution network 12, and a remote site 14. The central site 10 is the location for the digital encoding of MPEG-2 files from source video tapes, storage and management of digital files, management of remote site(s) 14, and distribution of schedules and MPEG-2

files. Thus, the processing, analysis, distribution, and management of data occurs at the central site 10. The distribution network 12 is the mechanism by which the remote site(s) 14 receive program streams and digital spots. The data distribution is accomplished via various methods, such as a satellite and/or land-based distribution. The broadcaster may choose to have the program stream sent via terrestrial links (e.g., token ring, ethernet, etc.), while the spot insertion is sent via satellites or vice versa.

The remote site(s) 14 house the remote site server(s) 16. By way of example, a suitable remote site server 16 includes a Pentium processor-based device with a hard disk for local storage and a video switch card (to switch between program and commercial insertion) running software including Windows NT, DMD programming, Lotus Notes client, Program Loader, and Symantec pcANYWHERE. These unattended, computerized systems receive the local insertion and provide As-Run file generation. The remote site server 16 is a video server that receives and stores digitized spots utilized for local insertion at the cable head-end. The remote site server 16 receives digitally encoded ads via satellite or other distribution network. These spots are decoded to an analog signal and inserted into the cable or network operator feed at scheduled times, i.e., into scheduled local availability times. The remote site server 16 can be customized in various configurations based on the number of output channels required, the type of output format (e.g., NTSC, PAL), the amount of local storage required (i.e., the number of spots on disk), the type of network (satellite or terrestrial), the type of trigger for spot insertion (e.g., time of day, VITC, cue-tome, VBI trigger), the audio format and connections (stereo, mini-XLR or XLR), the redundancy requirements (RAID, mirrored disks), and the preview channel.

By way of example, the following provides a sample process that illustrates an example of one process which the DMD solution can support. A region, e.g., any grouping of one or many cable head-ends for cities, states, provinces, or countries, defined by cable or network operators in an area, sells a commercial in the local availability time. All remote site servers 16 within the same region play the same material at the same time, including all network programs, national spots, local commercials, announcements, etc. The videotaped segment for the commercial is digitally encoded. The digital material is scheduled for delivery to each remote site server 16 prior to broadcast. The playlist, digitized spots, and the broadcast program stream are sent, via satellite, to all of the remote site servers 16 within the region. All of the remote site servers 16 within the region air the local spots for that region at the scheduled time. As-Run logs are retrieved by the central site 10 from the remote site servers 16. As-Run logs are sent to the local markets, reviewed, reconciled, and customers are billed. Commercials and As-Run logs are archived.

In accordance with the present invention, the central site 10 efficiently distributes objects and thus manages the resources of the remote site 14. By managing these resources, the central site 10 can determine when to send information to the remote site(s) 14. A main component in producing the management of the resources is the central site server 18. By way of example, a suitable central site server 18 includes an IBM RS/6000 F50 dual CPU system, or a Pentium II compatible PC, running the IBM UNIX operating system, AIX, DB2 server software, Lotus Notes server software, ADSM, Windows NT (for PC-based central site server), and the DMD programming. Suitable components for the control workstations 19 include Pentium compatible PCs running Windows NT, Lotus Notes client,

DB2 client, Microsoft Internet Explorer, and DMD programming.

The central site server 18 includes software on a suitable computer readable medium that is architected using a layered model, in which each layer isolates the upper layers from the details of the lower layers and individual components within a layer provide a unique set of services, as is well appreciated by those skilled in the art. Figure 2 illustrates an example of a suitable layered architecture for the central site server 18. The top layer 20 addresses the external interfaces of the central site server 18, including a graphical user interface (GUI) component and the interfaces to the external systems. The GUI component, e.g., using Lotus Notes, provides administrators and operators with the ability to monitor and control the DMD. The interfaces to external systems include interfaces to traffic systems, which interface to the central site 18 by way of files exchanged on an Internet file server, for example, interfaces to stations in a box (SIBs) which send Lotus Notes messages, and interfaces to encoder systems (22, Fig. 1), which store encoded spot files in a disk pool server for retrieval by the central site server 18.

Underneath the top layer is a layer 24 of specialized components including a stage manager component 26, an uplink server component 28, and a transmission scheduler component 30. This layer 24 may also include specialized components for creating commands and interpreting responses from SIBs, managing access to all the database queues and other data stores, and providing automated agents that run based on time or events to manage the external interfaces, e.g., processing files received from traffic systems. The stage manager 26 manages any tape related activity, the uplink server 28 manages transmissions through the uplink network (12, Fig. 1), and the transmission scheduler 30

manages scheduling tasks. Also included as a next layer is a programming layer 32. The layer 32 includes the programming libraries and APIs (application programming interfaces) that are used to build the specialized components. The lower two layers include an operating system layer 34 and a hardware layer 36 for the fundamental operation of the central site server 18, as is well appreciated by those skilled in the art.

The transmission scheduler 30 of layer 24 is responsible for managing transmissions from the central site 10 to the remote site server(s) 16. The transmission scheduler manages the transmission by executing a plurality of transforms (i.e., bodies of logic that take particular inputs and perform certain operations to produce particular outputs) and utilizing a plurality of queues, as described in co-pending U.S. Patent application entitled METHOD AND SYSTEM FOR OPTIMIZATION OF DISTRIBUTION TO REDUCE STORAGE REQUIREMENTS IN A DIGITAL MEDIA DISTRIBUTOR, serial no. unknown (docket no. BC999063/1498P), assigned to the assignee of the present invention, and incorporated herein by reference in its entirety.

In accordance with the present invention, increased control of transmission in the DMD is achieved through the use of tunable control parameters. Figure 3 illustrates a block diagram of the DMD system, including tunable control parameters represented by blocks 40, 42, and 44. The access and adjustment of the control parameters occurs via the control site 10, e.g., through an appropriate GUI input mechanism. Once set/updated, the parameters are sent to remote site(s) 14 via command/registry files over the distribution network 12. The tunable control parameters are broadly categorized as uplink parameters 40, scheduler parameters 42, and storage parameters 44, as shown. More particular examples of the

parameters relate to transmission limits, retention limits, value limits, and time window limits, as described hereinbelow. Note, the following parameter names and values are meant as illustrative, with the parenthetical data representing minimum/default/maximum values.

5 Playlist retention period (1/7/14): a storage parameter related to a retention limit for designating the number of days that a playlist is kept past the original creation date

Playlist entries (1/280/2880): a storage parameter related to a value limit for designating the maximum number of entries in a single playlist

Purgelist retention (1/7/14): a storage parameter related to a retention limit for designating the number of days that a purgelist is kept past the original creation date

10 Purgelist entries (1/720/720): a storage parameter related to a value limit for designating the maximum number of entries in a single purgelist

DOA retention period (1/7/30): a storage parameter related to a retention limit for specifying the number of days records are kept in the uplink queue and dead on arrival (DOA) tables

15 Transmission lookahead window (3/6/9): a scheduler parameter related to a time window limit for scheduling the number of hours before a spot is next scheduled to be played at an SIB that each spot is to be transmitted to each SIB

Staging lookahead window (20/20/40): a scheduler parameter related to a time window limit for scheduling the number of hours before the time at which the spot is next scheduled that the spot is staged on the central site hard disk public area

20 SIB playtime lookahead window (4/5/8): a scheduler parameter related to a time window limit for indicating the number of hours within a playtime of a spot that an SIB

checks to report a spot missing; these are spots scheduled to be played but which are not currently at the SIB

SIB spot disk high water mark (80/90/90): a scheduler parameter related to a value limit for indicating a percentage of used space on the SIB spot disk that, when equaled or exceeded, results in the SIB purge algorithm being invoked to free up space by deleting spots according to a chosen criteria (e.g., "least likely to be used"); expressed as a percentage of the total space available for spots

SIB spot disk low water mark (60/80/85): a scheduler parameter related to a value limit for indicating a percentage of space on the SIB spot disk that, when equaled or gone below, results in the stopping of the SIB purge algorithm

Searchable length of transmit queue (60/60/120): a scheduler parameter related to a transmission limit for indicating how far back in terms of minutes that the transmission scheduler should search for items in the queue to be made into a bundle for the uplink server

Searchable length of the staging queue (4/4/12): a scheduler parameter related to a transmission limit for indicating how far back in terms of hours that the transmission scheduler should search for items in the queue to be made into a bundle for the stage manager; preferably, should be same length as the searchable length of the transmit queue

Playlist transmission lookahead (24/48/72): a scheduler parameter related to a time window limit for determining how many hours in advance playlists are transmitted to the SIBs

Minimum transit time (1/5/60): a scheduler parameter related to a transmission limit for indicating the minimum time in terms of minutes that is a minimum total time in which a

spot can be transmitted to a SIB; If the life (i.e., time until a next scheduled play time) of a scheduled item is less than the minimum transit time when the spot reaches the head of the transmit queue, the spot is taken to be dead, because it cannot be transmitted in time.

SIB reporting timeout limit (1/5/60): a scheduler parameter related to a transmission limit for indicating a time in terms of minutes that the central site considers that a SIB callback is late (i.e., if the SIB does not callback within the selected number of minutes of the expected time)

History retention period (1/7/14): a scheduler parameter related to a retention limit for specifying the number of days records are kept in status logs

Schedule look-ahead (1/1/5): a scheduler parameter related to a time window limit for specifying the number of days of playlists that the transmission scheduler will attempt to process at a time

Maximum request deletion (1000/2000/5000): a scheduler parameter related to a value limit for specifying a maximum number of requests to be deleted at one time from the request queue when the requests reach the end of the retention period

Missing spot resend period (0.5/2/24): a scheduler parameter related to a transmission limit for specifying a resend period for missing spots where the missing spot was sent longer than the value specified and the current spot status is waiting for reconciliation in the uplink queue; preferably set at a value which is twice the callback interval

Non-spot retransmission limit (0/8/23): a scheduler parameter related to a transmission limit for specifying the number of retransmits allowed for non-spot files

Non-spot retransmission period (1/10/24): a scheduler parameter related to a transmission limit for specifying a duration in hours of a retransmission period for non-spot files

Request queue retention period (1/36/36): a scheduler parameter related to a retention limit for specifying the number of hours a record is kept in the request queue

Scheduler retention period (2/2/7): a scheduler parameter related to a retention limit for specifying the number of days that the system will keep past playlists and NLBSs (National Local Break Schedule)

Scheduler retransmission limit (0/3/5): a scheduler parameter related to a transmission limit for specifying the number of retransmissions

Scheduler retransmission period (1/4/6): a scheduler parameter related to a transmission limit for specifying the duration in hours of the retransmission period for spot files

Stage manager record expiration (0.5/0.5/1): a scheduler parameter related to a time window limit for indicating that the stage manager records will be marked expired if the air date time is sooner than the current time plus the specified offset time (in hours)

Stage manager queue retention period (1/24/24): a scheduler parameter related to a retention limit for specifying the number of hours records are kept in the stage manager queue

Spot unavailable warning (24/24/36): a scheduler parameter related to a transmission limit for specifying the number of hours prior to a scheduled air time that a spot must be on a server to avoid generating a spot not available warning message

Uplink expiration (0.5/0.5/1): a scheduler parameter related to a transmission limit for specifying an offset time in hours that is used to determine if there is not enough time to uplink a file

Uplink queue retention period (3/24/24): a scheduler parameter related to a retention limit for specifying a number of hours that records are kept in the uplink queue

Stage manager archive threshold (0/10/40): a scheduler parameter related to a time window limit for specifying the time in hours within the stage manager look-ahead to highlight de-archived spots

Stage manager look forward (4/4/12): a scheduler parameter related to a time window limit for specifying look forward time duration for the stage manager queue table

Stage manager look-ahead (20/20/40): a scheduler parameter related to a time window limit for specifying a look-ahead time in hours to retrieve the stage manager queue table; this value and the stage manager look forward are added to the current time to determine which spots should be staged for transmission

Uplink request window (0/0/1): uplink parameter related to a time window limit for specifying a minimum window size in hours for retrieval of a next request by the uplink server

Uplink broadcast interval (0.5/0.5/2): uplink parameter related to a transmission limit for specifying time interval in seconds between successive repeats of broadcast messages, schedules, and command files

Uplink broadcast transmissions (1/3/5): uplink parameter related to a value limit for specifying the number of successive repeats of broadcast messages, schedules, and

command files

Uplink forward (1/1/3): uplink parameter related to a time window limit for specifying duration in hours for the uplink component to transmit files

Uplink look-ahead (6/6/12): uplink parameter related to a time window limit for specifying look-ahead period in hours for the uplink component to start transmitting files

Through the present invention, a plurality of control parameters are provided that allow tuning of distribution in a DMD according to particular transmission needs. The use of the control parameters enhances the flexibility of achieving optimal management of transmissions from a central site to remote sites. More particularly, data storage, scheduling, and uplink components are tuned through the control parameters.

Although the present invention has been described in accordance with the embodiments shown, one of ordinary skill in the art will readily recognize that there could be variations to the embodiments and those variations would be within the spirit and scope of the present invention. For example, although particular control parameters have been described, these are meant as illustrative and not restrictive of the control parameters capable of use to tune distribution in a DMD. Accordingly, many modifications may be made by one of ordinary skill in the art without departing from the spirit and scope of the appended claims.

CLAIMS

What is claimed is:

- 1 1. A digital media distributor (DMD) with tunable control of digital media data
2 transmission, the DMD comprising:
3 a distribution network;
4 a central site system, the central site system utilizing a plurality of designated control
5 parameters, including uplink parameters, scheduler parameters, and storage parameters, for
6 controlling distribution of digital media data; and
7 a plurality of remote site servers for receiving digital media data transmissions from
8 the central site server via the distribution network according to the designated control
9 parameters.
- 1 2. A system of claim 1 wherein the plurality of uplink parameters relate to
2 transmission limits, value limits, and time window limits.
- 1 3. A system of claim 2 wherein the plurality of uplink parameters further comprises
2 one or more of a group comprising uplink broadcast transmissions, an uplink broadcast
3 interval, an uplink request window, an uplink forward, and an uplink look-ahead.
- 1 4. A system of claim 1 wherein the plurality of scheduler parameters relate to
2 transmission limits, value limits, time window limits, and retention period limits.

1 5. A system of claim 4 wherein the plurality of scheduler parameters further
2 comprises one or more of the group comprising an uplink queue retention period, a dead on
3 arrival retention period, a history retention period, a request queue retention period, a
4 scheduler retention period, a stage manager queue retention period, maximum request
5 deletion, an uplink expiration, a missing spot resend period, a non-spot retransmission limit,
6 a non-spot retransmission period, a scheduler retransmission limit, a scheduler
7 retransmission period, a spot unavailable warning, a schedule look-ahead, a stage manager
8 record expiration, a stage manager archive threshold, a stage manager look forward, a stage
9 manager look-ahead, and a transmission lookahead window, a staging lookahead window,
10 an SIB (station in a box) playtime lookahead window, an SIB spot disk high water mark, an
11 SIB spot disk low water mark, a searchable length of transmit queue, a searchable length of
12 the staging queue, a playlist transmission lookahead, a minimum transit time, and an SIB
13 reporting timeout limit.

1 6. A system of claim 1 wherein the plurality of storage parameters relate to retention
2 period limits and value limits.

1 7. A system of claim 6 wherein the plurality of storage parameters further comprise
2 one or more of a group comprising a playlist retention period, a purgelist retention period,
3 playlist entries, and purgelist entries.

1 8. A method for controlling distribution of digital media data by a digital media

2 distribution system, the method comprising:

3 utilizing a central site system to distribute digital media data to a plurality of remote
4 sites via a distribution network; and

5 designating a plurality of control parameters values, including uplink parameters,
6 scheduler parameters, and storage parameters, in the central site system for tuning the
7 distribution of the digital media data to the plurality of remote sites.

1 9. The method of claim 8 wherein designating a plurality of control parameter values
2 further comprises designating control parameters related to transmission limits.

1 10. The method of claim 9 wherein designating a plurality of control parameter
2 values further comprises designating control parameters related to retention period limits.

1 11. The method of claim 10 wherein designating a plurality of control parameter
2 values further comprises designating control parameters related to time window limits.

1 12. The method of claim 11 wherein designating a plurality of control parameter
2 values further comprises designating control parameters related to value limits.

1 13. The method of claim 9 wherein designating control parameters related to a
2 transmission limit further comprises designating one or more of a group comprising a
3 missing spot resend period, a non-spot retransmission limit, a non-spot retransmission

4 period, a scheduler retransmission limit, a scheduler retransmission period, a spot
5 unavailable warning, an uplink expiration, and an uplink broadcast interval, a searchable
6 length of transmit queue, a searchable length of the staging queue, a minimum transit time,
7 and an SIB reporting timeout limit.

1 14. The method of claim 10 wherein designating control parameters related to
2 retention limits further comprises designating one or more of a group comprising a playlist
3 retention period, a purgelist retention period, a dead on arrival retention period, a history
4 retention period, a request queue retention period, a scheduler retention period, a stage
5 manager queue retention period, and an uplink queue retention period.

1 15. The method of claim 11 wherein designating control parameters related to a time
2 window limit further comprises designating one or more of a group comprising a schedule
3 look-ahead, a stage manager record expiration, a stage manager archive threshold, a stage
4 manager look forward, a stage manager look-ahead, an uplink request window, an uplink
5 forward, an uplink lookahead, a transmission lookahead window, a staging lookahead
6 window, an SIB (station in a box) playtime lookahead window, and a playlist transmission
7 lookahead.

1 16. The method of claim 12 wherein designating control parameters related to a
2 value limit further comprises designating one or more of a group comprising playlist entries,
3 purgelist entries, maximum request deletion, and uplink broadcast transmissions, an SIB

4 spot disk high water mark, and an SIB spot disk low water mark.

1 17. A method for controlling digital advertisement distribution from a central site to
2 a remote site via a media network, the method comprising:

3 establishing values for one or more of a set of scheduler control parameters in the
4 central site;

5 establishing values for one or more of a set of uplink control parameters in the
6 central site;

7 establishing values for one or more of a set of storage control parameters in the
8 central site; and

9 managing distribution of digital advertisements to the remote sites based on the
10 established values.

1 18. The method of claim 17 wherein establishing values for the scheduler control
2 parameters further comprises establishing values for an uplink queue retention period, a dead
3 on arrival retention period, a history retention period, a request queue retention period, a
4 scheduler retention period, a stage manager queue retention period, maximum request
5 deletion, an uplink expiration, a missing spot resend period, a non-spot retransmission limit,
6 a non-spot retransmission period, a scheduler retransmission limit, a scheduler
7 retransmission period, a spot unavailable warning, a schedule look-ahead, a stage manager
8 record expiration, a stage manager archive threshold, a stage manager look forward, a stage
9 manager look-ahead, a transmission lookahead window, a staging lookahead window, an

10 SIB (station in a box) playtime lookahead window, an SIB spot disk high water mark, an
11 SIB spot disk low water mark, a searchable length of transmit queue, a searchable length of
12 the staging queue, a playlist transmission lookahead, a minimum transit time, and an SIB
13 reporting timeout limit.

1 19. The method of claim 17 wherein establishing values for the uplink control
2 parameters further comprises establishing values for uplink broadcast transmissions, an
3 uplink broadcast interval, an uplink request window, an uplink forward, and an uplink look-
4 ahead.

1 20. The method of claim 17 wherein establishing values for the storage control
2 parameters further comprises establishing values for a playlist retention period, a purgelist
3 retention period, playlist entries, and purgelist entries.

ABSTRACT

Aspects for providing tunable parameters to control distribution in a digital media distributor system are described. A digital media distributor (DMD) with tunable control of digital media data transmission aspect includes a distribution network, a central site system, and a plurality of remote site systems. The central site system utilizes a plurality of designated control parameters, including uplink parameters, scheduler parameters, and storage parameters, for controlling distribution of digital media data. The plurality of remote site servers receive digital media data transmissions from the central site server via the distribution network according to the designated control parameters.

5

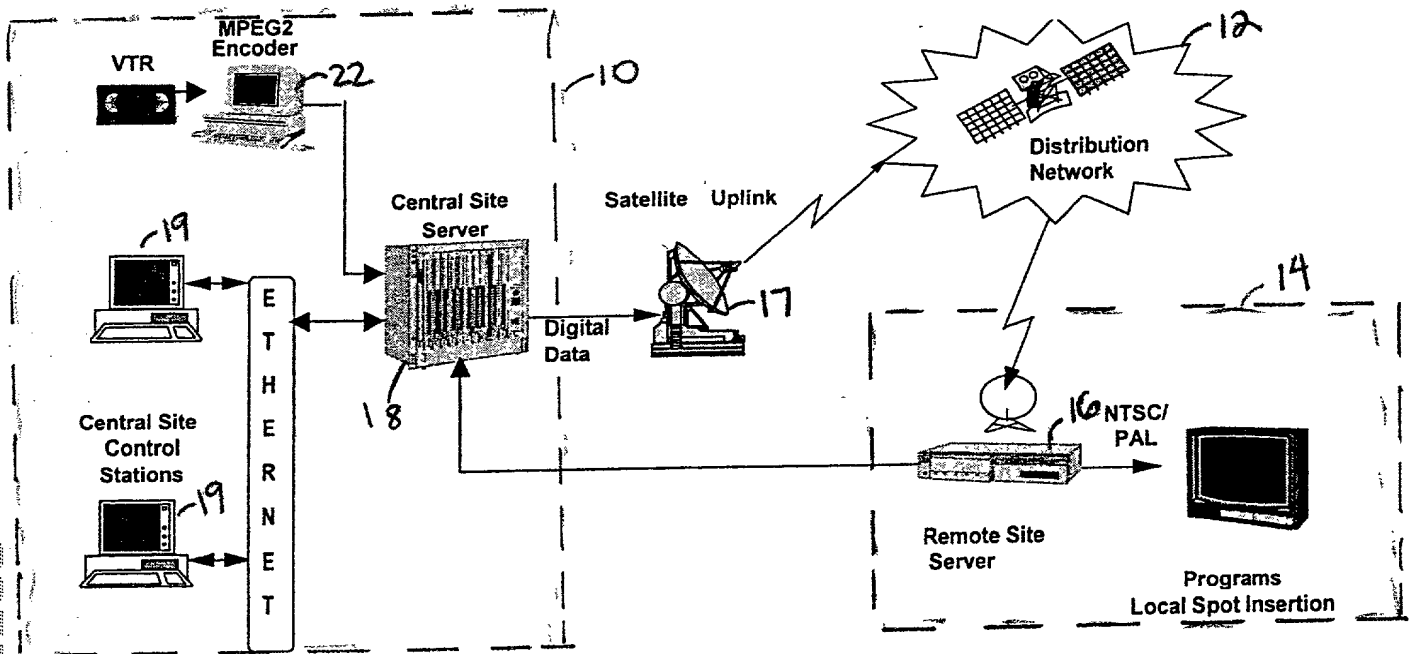


Fig.1


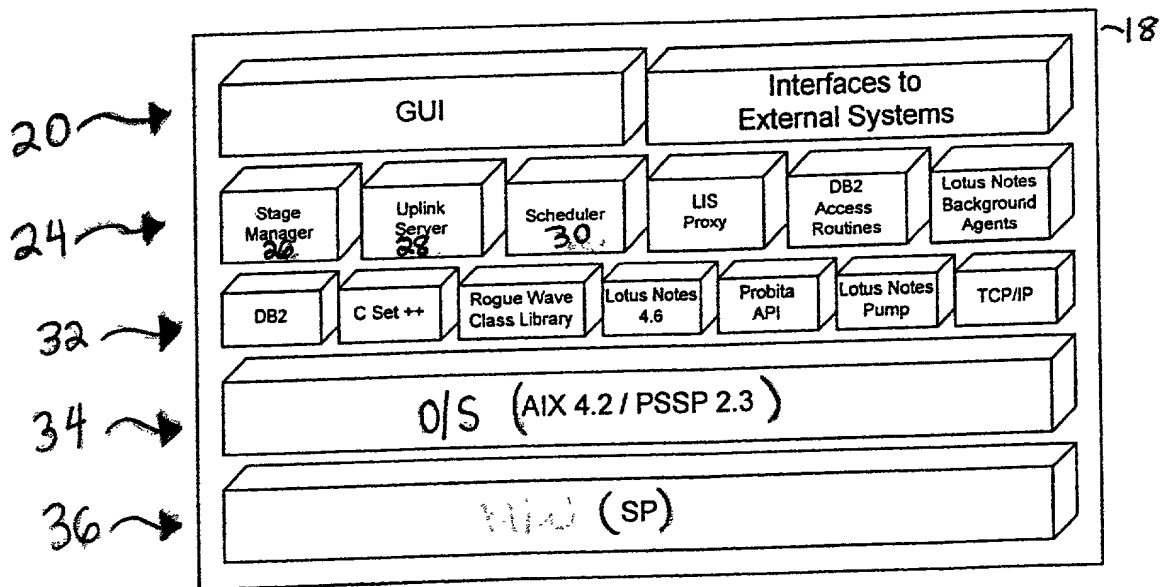


Fig.2

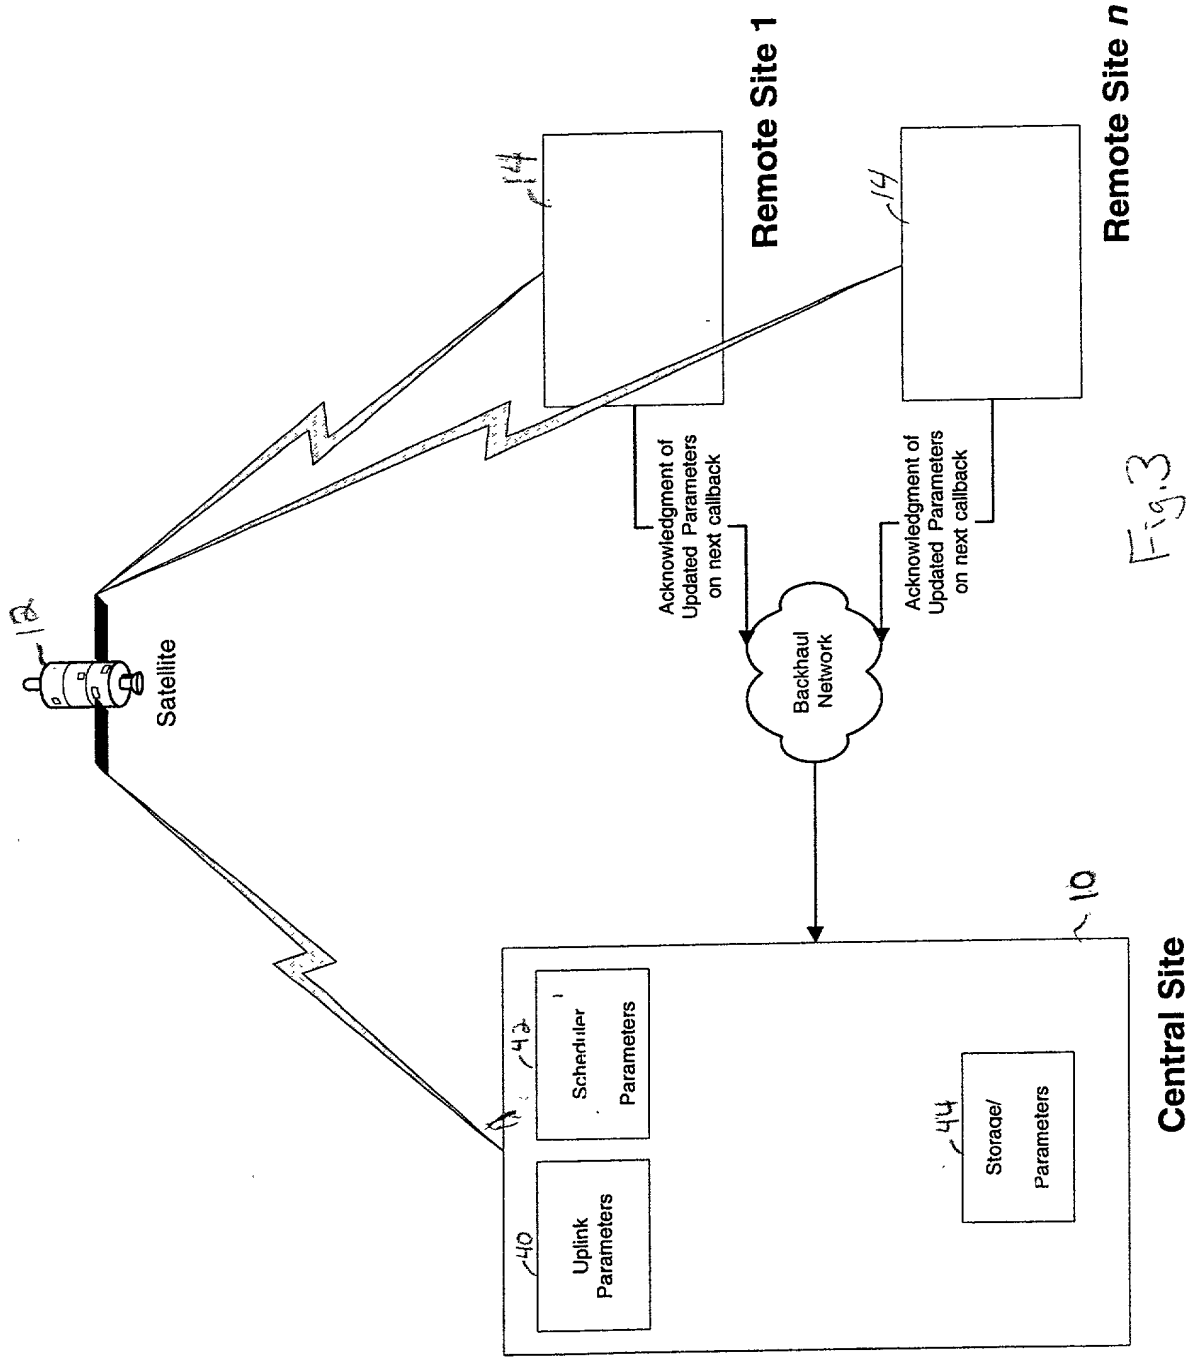

DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION

As a below named joint-inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**METHOD AND SYSTEM FOR PROVIDING TUNABLE PARAMETERS TO CONTROL DISTRIBUTION
IN A DIGITAL MEDIA DISTRIBUTOR**

the specification of which

X is attached hereto.

___ was filed on _____

under Attorney's docket no.: _____

as Application Ser. No.: _____

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and conduct all business in the United States Patent and Trademark Office connected therewith.

H. St. Julian, Reg. No. 30,329
Anthony N. Magistrale, Reg. No. 35,595
Martin J. McKinley, Reg. No. 31,782
Christopher A. Hughes, Reg. No. 26,914
Edward A. Pennington, Reg. No. 32,588
John E. Hoel, Reg. No. 26,279
George Grosser, Reg. No. 25,629

Joseph C. C. Redmond, Reg. No. 18,753
Joseph A. Sawyer, Jr., Reg. No. 30,801
Janyce R. Mitchell, Reg. No.: 40,095
Stephen G. Sullivan, Reg. No.: 38,329
Michele Liu, Reg. No.: 44,875
Wendell J. Jones, Reg. No. P45,961

Please direct all telephone calls to Mr. **Joseph A. Sawyer, Jr.** at telephone number **(650) 493-4540** and address all correspondence to: **SAWYER LAW GROUP, P.O. Box 51418, Palo Alto, California 94303**


Full Name of **first**/joint Inventor: **Jennie Ching**

Residence Address: **19204 Stare Street, Northridge, California 91324**

Country of Citizenship: **United States of America**

Post Office Address: **Same**

Signature of Inventor:



Date: 3/7/00


Full Name of **second**/joint Inventor: **Eric Hsiao**

Residence Address: **1905 Kerns Avenue, San Marino, California 91108**

Country of Citizenship: **United States of America**

Post Office Address: **Same**

Signature of Inventor:



Date: 3/7/00

Date: Mar 9, 2020